


# LORIX<sup>One</sup>

Low cost LoRa IP43/IP65 gateway




## Quick start guide

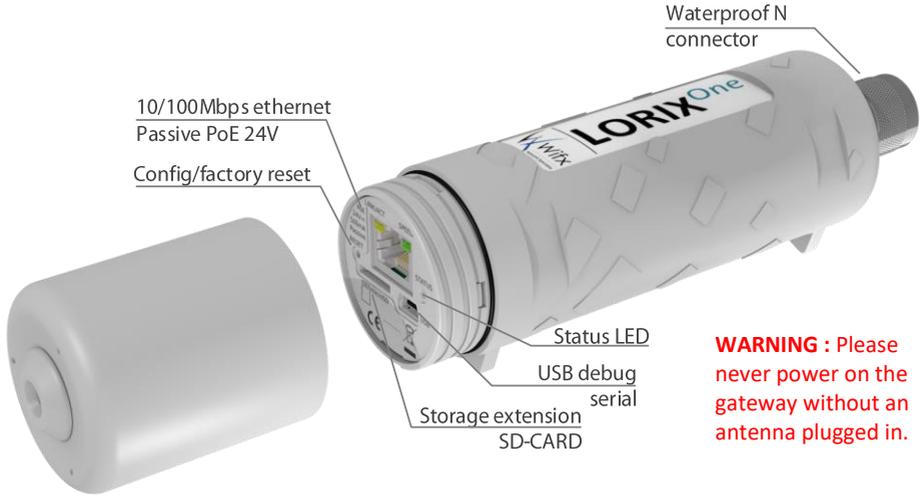

### INTRODUCTION

Thank you for purchasing the LORIX One low cost LoRa gateway made by Wifx Sàrl. This quick start guide is made to help you to quickly install and use your product. It includes in addition the warranty terms.

### OVERVIEW

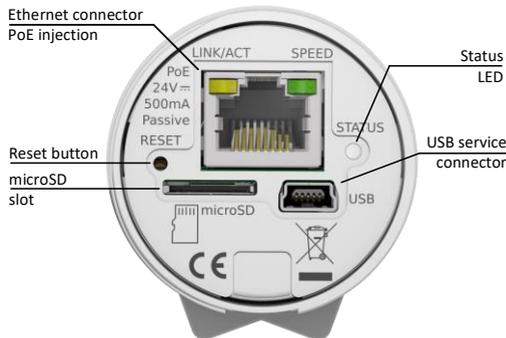

### CONTENT

The package contains:

- LORIX One LoRa gateway (IP43 or IP65)
- UV resistant zip ties (x2)
- Passive PoE injector
- 24VDC/12W switching adapter HNP12-240L6
- Indoor 2dBi antenna  
or
- Outdoor 4.15dBi IP65 antenna
- Quick start guide

### INSTALLATION AND CONSTRAINTS

The product is designed to be placed **vertically** with the antenna **upwards**. Mounting the product differently doesn't ensure waterproofing or could decrease thermal performance.

In addition, the product needs the IP65 antenna to be well fixed to guarantee a global IP65 level.

To install, it begins by opening the low side cap, remove the cable gland and pass the cable connector through the hole.

Once the cable is connected into the Ethernet PoE connector, put back the cap and screw it until it blocks. You can now insert the cable gland around the cable and push it into the hole, the flat side inside the cap. The cable gland assures the waterproofing then it's important to insert it correctly.

Connect the other side cable into the PoE injector (socket side) and the switching adapter into the power socket of the PoE injector. Once the switching adapter powered, the gateway's Linux OS starts and is accessible 20sec afterwards.



PoE Ethernet port supports 24VDC. Use only the provided power supply adapter. The max consumption is 3W.

### ACCESSING THE CONFIGURATION TERMINAL

The product is accessible either by SSH using its Ethernet port or by USB using a mini-B cable. Regardless the way you access it, the login is **admin** and the password is **lorix4u**.

#### THROUGH SSH

Power up your product and access it by the IP address **192.168.1.50**. By default, it's configured to use static address and can be changed once connected.

#### THROUGH USB

Power up your product and connect a mini-B cable into the USB service connector which will act as virtual COM port.

In Linux, a serial port program like Minicom can be used to access the newly created COM port under **/dev/ttyACMx**.

In Windows 7, 8.1 or 10, the driver will be automatically installed and a virtual COM port is created (can be seen in the Device Manager). A program like Putty can be used to access the COM port named **COMx**.

The connection parameters are 115200 bauds, 8 data bits, 1 stop, no parity and no flow control.

### FACTORY RESET

A factory RESET setting network configuration, password and LoRa parameters to their factory default values can be easily made by pressing the RESET button for more than 10sec, until the status LED blinks.

#### CONFIGURATION

Most of the system is protected against wrong manipulation allowing most of commands and files only in root mode. Modifications can be made using explicitly the command `sudo` :

```
sama5d4-lorix-one:/$ sudo mkdir /tstdir
```

The password is then asked and kept in cache for 15min.

#### LAN CONFIGURATION

To change the network configuration, edit the file `/etc/network/interfaces` with nano or vi accordingly to your needs. The details about the network configuration can be found at [https://lorixone.io/wiki/Network\\_Interface](https://lorixone.io/wiki/Network_Interface).

## CLOUDS APPLICATION AND SERVICE

By default, the gateway is preconfigured with LORIoT cloud and autostart option (starts at boot time). You can modify these parameters using the following command:

```
sama5d4-lorix-one:/$ sudo /etc/init.d/clouds-manager.sh configure
```

## MORE INFORMATION

Complementary information can be found on the LORIX One website

<https://www.lorixone.io>

And under the wiki

<https://www.lorixone.io/wiki>

## RETURN MERCHANDISE AUTHORIZATION

Wifx Sàrl offers a warranty of 24 months on the LORIX One gateway from the date of the invoice. The product is warranted to the purchaser to be free of defects in material and workmanship. The warranty does not cover damage caused by mechanical shocks, electrical shocks, natural disasters or other damages caused by accident or by misuse of the product.

Before returning a damaged item to Wifx Sàrl, please send an email to [rma@lorixone.io](mailto:rma@lorixone.io) with the MAC address of the gateway and provide as much information as possible concerning the problem. A RMA number will be assigned to you.

Wifx Sàrl does not offer any technical repair on products which are out of the warranty period. If the warranty of the returned merchandise has expired, Wifx Sàrl will return the merchandise to the customer at his/her own expense. If the customer does not claim the rejected items within 12 months, Wifx Sàrl has the right to destroy them.

Please ensure that, if there is a problem with the gateway and that it does not function properly before returning it. If this is not the case, the customer will have to cover for the shipping expenses and up to 50 CHF for testing each gateway if the problem has not been detected.

IMPORTANT NOTICE before returning merchandise makes sure that:

- The warranty is still valid (check the date of the invoice)
- The problem does not come from the software
- You have received your RMA number for the return by e-mail

The shipping costs for the return of merchandise are at the customer's expense. If the reparation is done under warranty, Wifx Sàrl will return the merchandise to the customer without any cost. The RMA number must be mentioned on the delivery note. Please include a copy of the invoice to prove that the warranty is still valid. The content of the package must correspond to what is mentioned on the RMA form, otherwise the package will be immediately returned. In this case, the customer will cover for the shipping costs.

The returned merchandise must be properly packaged to prevent any damage during transport. Such damage can false the analytical result and/or cancel the validity of the warranty. Please send the merchandise to the address of the RMA (which will be issued upon approval of your RMA form).

## USEFUL DATA

The returned merchandise for repair must be unlocked, or provided with the full password and access information. Only send the defective merchandise. Please do not return the components of the electrical supply (AC adaptor, PoE power injector or power plug). This will reduce your shipping costs.

Please inform us about any modification concerning your company. E-mail: [info@lorixone.io](mailto:info@lorixone.io)  
 For any RMA questions, contact [rma@lorixone.io](mailto:rma@lorixone.io)

## DECLARATION OF CONFORMITY

<b>English</b>	Hereby, Wifx Sàrl, declares that this LORIX One device, is in compliance with the essential requirements and other relevant provisions of Directive 2014/53/EC.
<b>Français [French]</b>	Par la présente Wifx Sàrl déclare que l'appareil LORIX One, est conforme aux exigences essentielles et aux autres dispositions pertinentes de la directive 2014/53/CE.
<b>Deutsch [German]</b>	Hiermit erklärt Wifx Sàrl, dass sich dieses LORIX One Gerät, in Übereinstimmung mit den grundlegenden Anforderungen und den anderen relevanten Vorschriften der Richtlinie 2014/53/EG befindet.
<b>Italiano [Italian]</b>	Con la presente, Wifx Sàrl, dichiara che questo dispositivo LORIX One, è conforme ai requisiti essenziali ed alle altre disposizioni pertinenti della direttiva 2014/53/CE.
<b>Português [Portuguese]</b>	Wifx Sàrl declara que este dispositivo LORIX One está conforme com os requisitos essenciais e outras disposições da Directiva 2014/53/CE.
<b>Español [Spanish]</b>	Por medio de la presente Wifx Sàrl declara que este dispositivo LORIX One cumple con los requisitos esenciales y cualesquiera otras disposiciones aplicables o exigibles de la Directiva 2014/53/CE.
<b>Česky [Czech]</b>	Wifx Sàrl tímto prohlašuje, že toto LORIX One zařízení, je ve shodě se základními požadavky a dalšími Příslušnými ustanoveními směrnice 2014/53/ES.
<b>Dansk [Danish]</b>	Hermed, Wifx Sàrl, erklærer at denne LORIX One enhed, er i overensstemmelse med de væsentlige krav og øvrige relevante krav i direktiv 2014/53/EF.
<b>Nederlands [Dutch]</b>	Hierbij verklaart Wifx Sàrl, dat deze LORIX One apparaat, in overeenstemming is met de essentiële Eisen en de andere relevante bepalingen van richtlijn 2014/53/EG.
<b>Eesti [Estonian]</b>	Käesolevaga Wifx Sàrl kinnitab, et antud LORIX One seade, on vastavus olulistele nõuetele ja teistele asjakohastele sätetele direktiivi 2014/53/EÜ.
<b>Suomi [Finnish]</b>	Täten Wifx Sàrl vakuuttaa, että tämä LORIX One laite, on yhdenmukainen olennaisten vaatimusten ja muiden sitä koskevien direktiivin 2014/53/EY.
<b>Ελληνική [Greek]</b>	Δια του παρόντος, Wifx Sàrl, δηλώνει ότι αυτή η συσκευή LORIX One είναι σε συμμόρφωση με τις βασικές απαιτήσεις και τις λοιπές σχετικές διατάξεις της οδηγίας 1995/5/EK.
<b>Magyar [Hungarian]</b>	Ezennel Wifx Sàrl kijelenti, hogy ez a LORIX One készülék megfelel az alapvető követelményeknek és más vonatkozó 2014/53/EK irányelv rendelkezéseit.
<b>Íslenska [Icelandic]</b>	Hér, Wifx Sàrl, því yfir að þetta LORIX One tæki er í samræmi við grunnkröfur og önnur viðeigandi ákvæði tilskipun 2014/53/EB.
<b>Latviski [Latvian]</b>	Ar šo, Wifx Sàrl, deklarē, ka LORIX One ierīce, ir saskaņā ar būtiskajām prasībām un citiem attiecīgiem noteikumiem Direktīvā 2014/53/EK.
<b>Lietuviškai [Lithuanian]</b>	Wifx Sàrl deklaruoja, kad šis LORIX One įrenginys atitinka esminius reikalavimus ir kitas 2014/53/EB Direktyvos nuostatas.
<b>Malti [Maltese]</b>	Hawnhekk, Wifx Sàrl, tiddikjara li dan il-mezz LORIX One huwa konformi mar-rewkwiżiti essenzjali u dispożizzjonijiet rilevanti oħrajn ta 'Direttiva 2014/53/KE.
<b>Norsk [Norwegian]</b>	Herved Wifx Sàrl, erklærer at denne LORIX One enheten, er i samsvar med de grunnleggende kravene og andre relevante bestemmelser i direktiv 2014/53/EF.
<b>Polski [Polish]</b>	Niniejszym, Wifx Sàrl, oświadcza, że urządzenie LORIX One jest zgodny z zasadniczymi wymaganiami oraz pozostałymi stosownymi postanowieniami Dyrektywy 2014/53/WE.
<b>Română [Romanian]</b>	Prin prezenta, Wifx Sàrl declară că acest dispozitiv LORIX One este în conformitate cu cerințele esențiale și alte prevederi relevante ale Directivei 2014/53/CE.
<b>Slovensky [Slovak]</b>	Týmto Wifx Sàrl, prehlasuje, že toto LORIX One zariadenie, je v súlade so základnými požiadavkami a ďalšími relevantnými ustanoveniami smernice 2014/53/ES.
<b>Svenska [Swedish]</b>	Härmed Wifx Sàrl, intygar att denna LORIX One enhet är i överensstämmelse med de väsentliga egenskapskrav och övriga relevanta bestämmelser som framgår av direktiv 2014/53/EG.